

High-Performance Features & Benefits

Crafted for Quality, Designed for Value. Finestra Window & Door features a complete family of vinyl windows and doors.

PREMIER CRAFTSMANSHIP

- Single Hung Window meets AAMA Grade 50 Performance & above. See our website for additional performance data
- Metal reinforced meeting rail and sash with true interlock system for added strength & security
- Interlocking sweep lock with hidden zinc keeper for added security (passes forced entry test)
- Geometric & architectural shapes
- Standard continuous head & sill factory mulling

STRENGTH & INSULATION

- Sealed insulating glass with warm edge metal free insulating glass system maximizes thermal performance & reduces condensation
- Dual felt wool pile weather stripping for maximum air leak protection with foam filled bulb seal at bottom of operating sash
- 4 point fusion-welded corners along with double wall frame provides added strength & insulation



GLASS OPTIONS

Choose from a variety of glass options to meet your aesthetic & performance needs, including Low-E, obscure, tempered, & rain glass. Available configurations include:


- **Simulated Divided Lite (SDL):**
1-1/8"
- **Grids Between the Glass (GBG):**
3/4" flat grids available
- **Insulating Glass (I-G):**
3/4" standard

OPTIONS

- Insect screen available
- WOCD's available
- Oriel configurations available
- Field mullion for added flexibility
- ADA locks available



Ease of Installation & Worry-Free Maintenance

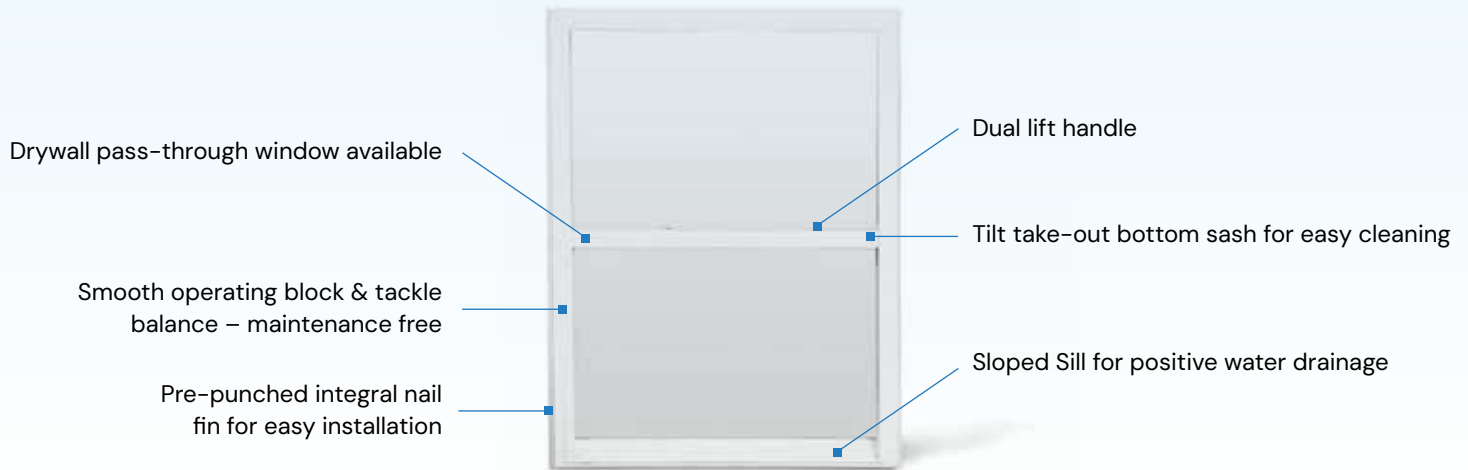

Available Vinyl Frame Colors



Typical Grid Patterns



* The grids patterns shown above are just a small sample of the styles and configurations. Consult your Finestra Window & Door Sales Representative when ordering for a more complete selection of grid styles available.

Thermal Performance

Style	U-Value LoE/Argon Surface #2	U-Value LoE/Argon Surface #2 & #4	R-Value LoE/Argon Surface #2	R-Value LoE/Argon Surface #2 & #4	SHGC No Grids	SHGC with Grids
64 Single Hung	0.28	0.24	3.57	4.17	0.23	0.20

Structural Performance



Air Infiltration @ 25 mph	0.20 cfm/ft ²
Water Penetration	7.50 psf
Uniform Loads	+ / - DP50
Rating	PG 50 - H

